



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com


PROJECT NAME: _____

LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore® Dual Lever Knee Operated Valve KL25-3000

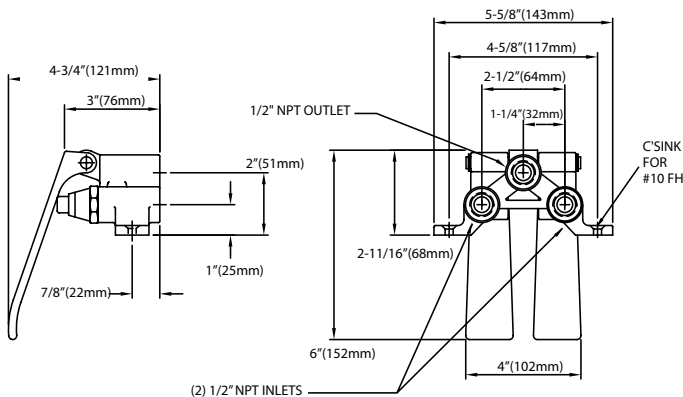

Dimensions shown in inches (mm) are for reference only
and are subject to change.

Pedal Valve:

(2) 1/2" NPT Female Inlets
(1) 1/2" NPT Female Outlet
Operating Temperature: 40 - 180°F
Operating Pressure: 20 - 125psi
#10 mounting holes

Approximate shipping weight - 4 lbs
Warranty - 2 years parts

Solid heavy duty cast brass

Commercial Quality Features

- Knee operated valve
- For use with spout bases
- Self-closing valves
- Color indexed levers
- Dual lever operation
- (2) 1/2" NPT female inlets and (1) 1/2" NPT female outlet
- Rough chrome valve body with highly polished chrome knee levers

SPECIFICATIONS:

Dual lever knee valve to be Encore KL25-3000. Dual lever knee valve to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Knee levers to have self-closing valves and color-coded indicators for hot and cold.

COMPLIES WITH:

ASME A112.18.1-2005
CSA B125.1-05
NSF/ANSI 61/9, ANNEX G
SECTION 116875 OF THE
CALIFORNIA HEALTH & SAFETY CODE
(COMMONLY KNOWN AS AB1953)
VERMONT ACT 193
UNIFORM PLUMBING CODE

