

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Low Lead Add-On Faucet with Swing Spout, and 4" Wrist Blade Handle

KL55-70xx-SE4 Series

- KL55-7006-SE4 6" Spout
- KL55-7008-SE4 8" Spout
- KL55-7010-SE4 10" Spout
- KL55-7012-SE4 12" Spout
- KL55-7014-SE4 14" Spout
- KL55-7016-SE4 16" Spout

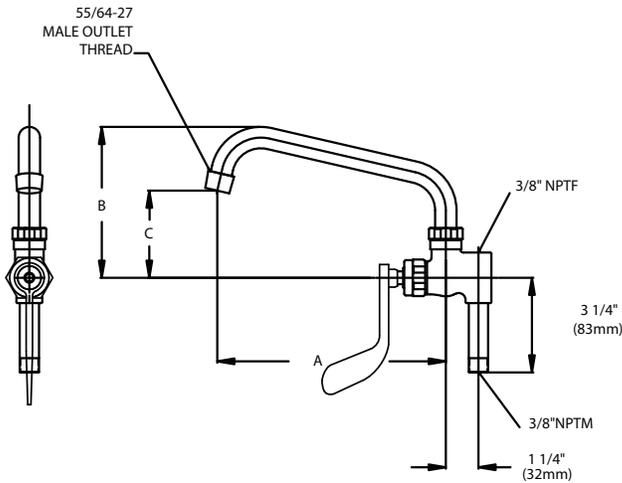

Dimensions shown in inches (mm) are for reference only and are subject to change.

3/8" NPT male riser pipe inlet
3/8" NPT female outlet
Operating Temperature: 40-180°F (5-83°C)
Operating Pressure: 15-125psi
Note: 1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples

Approximate shipping weight - 3 lbs
Warranty - 2 years parts

Solid heavy duty low lead cast body is specification and commercial quality

Commercial Quality Features

- Tubular swing spout design
- ADA-compliant 4" wrist blade handle
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design

SANIGUARD[®] Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Low Lead Add-On Faucet to be Encore KL55 Series in the following configuration:

- _____ KL55-7006-SE4 6" Spout
- _____ KL55-7008-SE4 8" Spout
- _____ KL55-7010-SE4 10" Spout
- _____ KL55-7012-SE4 12" Spout
- _____ KL55-7014-SE4 14" Spout
- _____ KL55-7016-SE4 16" Spout

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Handle to be 4" wrist blade and incorporated with SANIGUARD treatment. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be tubular swing style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL55-7006-SE4	6" (152mm)	4-3/4" (121mm)	2-1/2" (64mm)
KL55-7008-SE4	8" (203mm)	5-1/4" (133mm)	3" (76mm)
KL55-7010-SE4	10" (254mm)	5-3/4" (146mm)	3-1/2" (89mm)
KL55-7012-SE4	12" (305mm)	6-1/4" (159mm)	4" (102mm)
KL55-7014-SE4	14" (356mm)	6-3/4" (171mm)	4-1/2" (114mm)
KL55-7016-SE4	16" (406mm)	7-1/4" (184mm)	5" (127mm)

COMPLIES WITH:
ASME A112.18.1-2005
CSA B125.1-05
NSF/ANSI 61/9, ANNEX G
SECTION 116875 OF THE
CALIFORNIA HEALTH & SAFETY CODE
(COMMONLY KNOWN AS AB1953)
VERMONT ACT 193
UNIFORM PLUMBING CODE

