



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701  
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110  
[www.toplineplumbing.com](http://www.toplineplumbing.com)

**PROJECT NAME:** \_\_\_\_\_  
**LOCATION:** \_\_\_\_\_  
**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_  
**TOP-LINE PART NO.** \_\_\_\_\_

TOP-LINE® Low Lead 8" OC Wall Mount  
Pre-Rinse Assembly with Quarter Turn  
Ceramic Valves and Add-On Faucet

## TLL13-1100-AFx

TLL13-1100-AF1	6" Add-On
TLL13-1100-AF2	8" Add-On
TLL13-1100-AF3	10" Add-On
TLL13-1100-AF4	12" Add-On
TLL13-1100-AF5	14" Add-On
TLL13-1100-AF6	16" Add-On
TLL13-1100-AF7	18" Add-On



Approximate shipping weight - 13 lbs  
Warranty - 1 year parts

Solid low lead heavy-duty cast body is specification and commercial quality.

### Commercial Quality Features

- Quarter turn ceramic valves
- Built-in check valve to prevent cross-flow and back-flow
- 1.6 gpm water saving spray head
- ADA-compliant lever handles

### Spray Valve

- Spray head hook holds spray head away from work area when not in use
- Heat resistant, non-marring, impact resistant bumper will not fatigue under extreme operating temperatures

### Kool Grip™ Hose Grip

- Reduces heat transfer to the hand; stays up to 30 degrees cooler than competitors' grips
- Ergonomic spray handle fits comfortably in even small hands and is easy to use

### SPECIFICATIONS:

8" OC Wall Mount Pre-Rinse Assembly to be TOP-LINE TLL13-1100-AFx.

Pre-rinse faucet body to be constructed of polished chrome plated brass. Hose to be constructed of 3-ply nylon reinforced Santoprene® permanently secured with high pressure hydraulic fittings pressure tested to 400 psi. Hose to be of washerless, leak-proof design, protected by interlocking helical stainless steel coils for maximum protection and flexibility. Heavy-duty ergonomic gooseneck spring ensures proper hose position. A patented wall bracket with compression fitting is provided to facilitate installation and give 360° of support. Riser to include spray head hook to hold spray head away from work area when not in use. Spray head to be 1.6gpm @ 60psi. Spray assembly to be equipped with Kool Grip™ handle to reduce heat transfer to hand.





# TLL13-1100-AFx

## Low Lead 8" OCWall Mount Pre-Rinse Assembly with Quarter Turn Ceramic Valves and Add-On Faucet



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701  
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110  
[www.toplineplumbing.com](http://www.toplineplumbing.com)

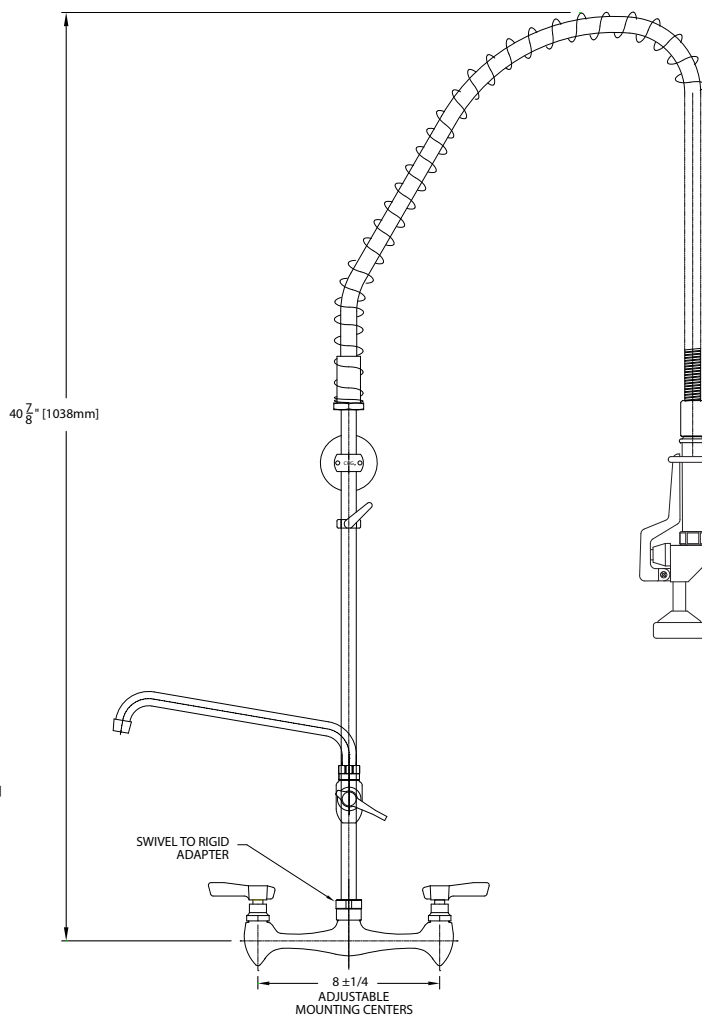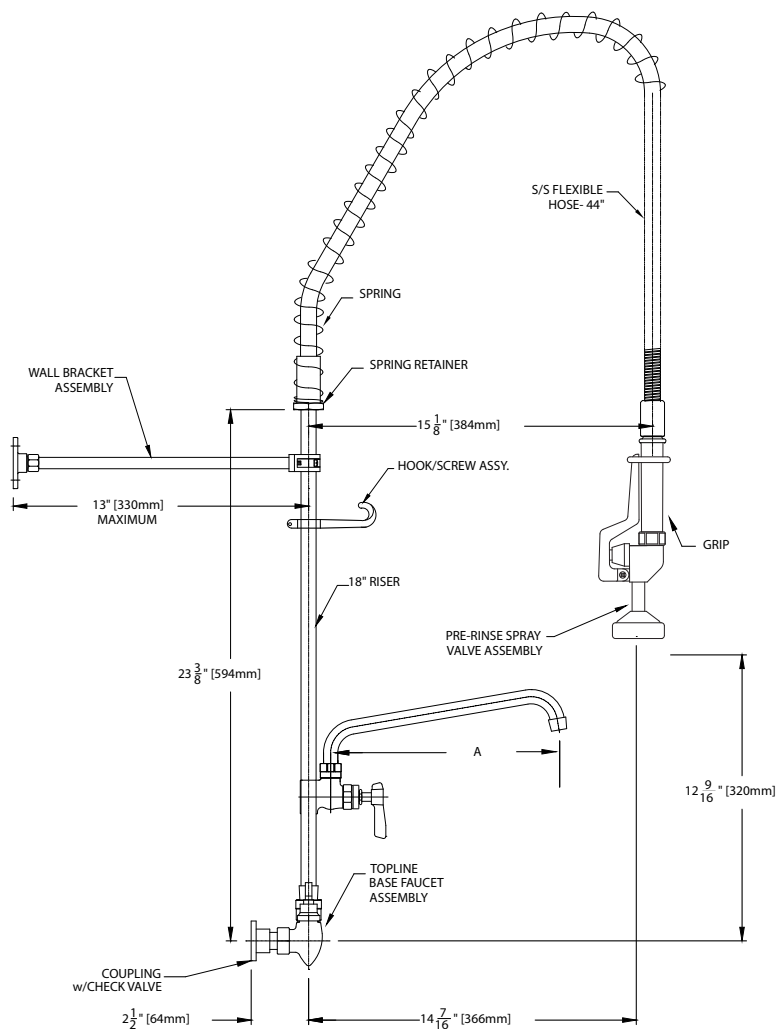

1-1/2" (29mm) holes for wall are recommended to accommodate 1/2" supply nipples.

1/2" NPSM Male Inlets

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Model No.	A
TLL13-1100-AF1	6" (152mm)
TLL13-1100-AF2	8" (203mm)
TLL13-1100-AF3	10" (254mm)
TLL13-1100-AF4	12" (305mm)
TLL13-1100-AF5	14" (356mm)
TLL13-1100-AF6	16" (406mm)

Dimensions shown in inches (mm) are for reference only and are subject to change.