## ICB Twin Platinum Edition, 120/240V SST

Height: 26.8" Width: 20.2" Depth: 24.7" (68.1cm) (51.3cm) (62.7cm)





- Produce fresh cold brew in minutes with the new Cold Brew mode, enabling
  operators to brew an on-demand batch of concentrate or ready-to-drink cold brew
  quickly and consistently with operational ease
- Add Bubble Tea to the menu with the new Bubble Tea Kit (54165.1018)
- 4.3" Color Touchscreen aides in customizing recipes, brewing options and control
- SmartWAVE sprayhead technology provides enhanced uniformity of extraction and lime scale reduction
- Brews into 2.5 to 3.8L (84 to 128 oz) airpots and 3.8 to 5.7L (1 to 1.5 gallon) baseless Thermofresh servers
- Large 5.6 gallon (21.2L) tank provides back-to-back brewing capacity
- BUNN Infusion Series technology allows for multiple recipes from one footprint
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction™ Sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction
- Electronic funnel lock prevents removal of the brew funnel until drip-through is complete
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing
- Optional BUNNlink® remote monitoring support (kit required)
   Agency:







Additional Features

### **Specifications**

Product #: 53400.0100 Funnel: Black Plastic

Water Access: Plumbed Interface: Wireless

Finish: Stainless

## **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
120/240	25	6000	Yes/	-	280	60°F (15.5°C)	1	3	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

### Plumbing Requirements


PSI kPa		Fitting Supplied	Water Flow Required (GPM)					
20-90	138-621	3/8" Male Flare Fitting	1.00					

### **CAD Drawings**

2D	Revit	KLC
•		

WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



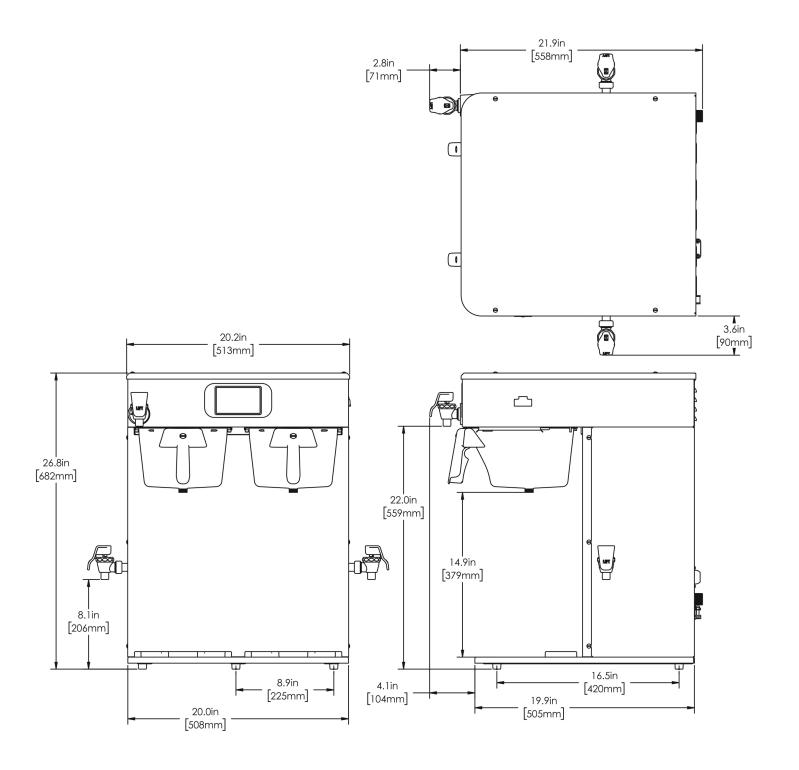

		Unit		Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	26.8 in.	20.2 in.	24.7 in.	30.0 in.	23.9 in.	28.4 in.	83.000 lbs	11.761 ft³	
Metric	68.1 cm	51.3 cm	62.7 cm	76.2 cm	60.6 cm	72.1 cm	37.649 kgs	0.333 m³	




# Related Products & Accessories: ICB Twin Platinum Edition, 120/240V SST(53400.0100)






























KIT, LTE BUNNLINK BOARD TEA AND INFUSION Product #: 57133.0003

# Serving & Holding Options: ICB Twin Platinum Edition, 120/240V SST(53400.0100)



AIRPOT, 2.5L GL PB SINGLE PK

Product #:13041.0001



AIRPOT, 2.5L GL PB 6/ CASE

Product #:13041.0101



AIRPOT, 2.5L SST LA SINGLE PK

Product #:32125.0000



AIRPOT, 2.5L SST LA 6/ CASE

Product #:32125.0100



AIRPOT, 3.0L SST LA SINGLE PK

Product #:32130.0000



AIRPOT, 3.0L SST LA 6/ CASE

Product #:32130.0100



AIRPOT, 3.8L SST LA SINGLE PK

Product #:36725.0000



AIRPOT, 3.8L SST LA 6/ CASE

Product #:36725.0100



TF SERVER, DSG2 1G SST NOBASE

Product #:42700.0050



TF SERVER, DSG2 1G **BLK NOBASE** 

Product #:42700.0051



TF SERVER, 1G DSG **GEN3 NOBASE** 

Product #:42700.0250



TF SERVER, DSG2 1.5G SST NOBAS

Product #:42750.0050



TF SERVER, 1G/3.8L MECH NOBASE

Product #:44000.0050



TF SERVER, 1G/3.8L MECH BLK NOBASE

Product #:44000.0051



TF SERVER, 1G MECH **GEN3 NOBASE** 

Product #:44000.0250



MECH NOBASE

Product #:44050.0050



MECH BLK NOBASE

Product #:44050.0051



STAND ASSY, TF **SERVER** 

Product #:54473.0000



STAND ASSY KIT, TF **SERVER** 

Product #:54473.1000