ICB TWIN TF 1.5 Gal PE, 120/240V SST

34.0" x 22.4" x 22.6" (86.4cm x 56.9cm x 57.4cm)



- Intuitive 4.3" touchscreen with user interface provides an enhanced experience when operating and programming the brewers
- SmartWAVE sprayhead technology creates an industry best uniformity of extraction for exceptionally smooth tasting coffee
- Platinum Edition SmartWave technology delivers a timed air purge at the end of the brew cycle, removing residual water from the sprayhead, reducing lime build up and ultimately extending the life of the equipment
- The ICB Twin Infusion Series coffee brewer delivers twice the brew capacity, from a single platform
- Multiple recipes from one footprint --- with six brew buttons and two batch sizes
- Large 5.6 gallon (21.2L) tank provides back-to-back brewing capacity
- USB port for easy programming
- Digital readout displays in English, Spanish, or French ---for easier programming and control
- Energy-saver mode reduces tank temperature during idle periods
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- ICB TF 54200.0101 is compatible with new TF 1.5-gallon ThermoFresh® Servers (with Base), all previous generations of TF 1.5-gallon TF Servers (with Base), Titan® 1.5-gallon servers, and Airpots

Agency:

Legs: 4" Satin Nickel Legs





Specifications

Product #: 54200.0101 Faucet: Lower

Water Access: Plumbed

Interface: Wireless Finish: Stainless

Funnel: Smart Funnel

Additional Features

Hot Water Button

Electrical & Capacity

Volts	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120/240	25	6000	Yes/	-	280	60°F (15.5°C)	1	3	60

Plumbing Requirements


	i idinanig itaquirania							
PSI		kPa Fitting Supplied		Water Flow Required (GPM)				
	20-90	138-621	3/8" Male Flare Fitting	1.00				


CAD Drawings


2D	Revit	KLC
•		



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.



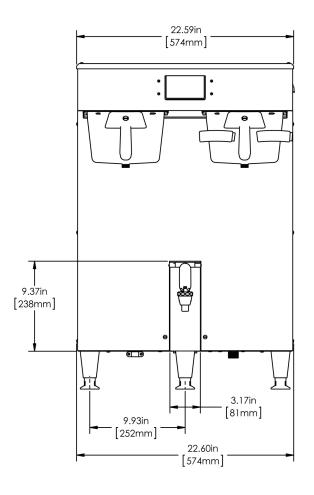

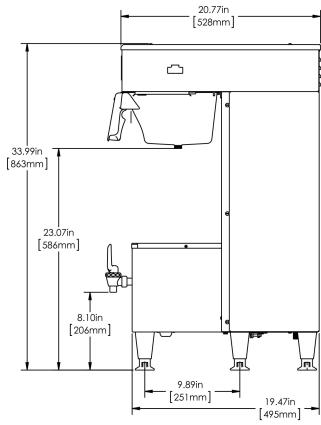

	Unit				Shipping				
	Width	Height	Depth	Width	Height	Depth	Weight	Volume	
English	22.6 in.	34.0 in.	22.4 in.	22.6 in. in.	34.0 in. in.	19.5 in. in.	81.500 lbs	8.655 ft ³	
Metric	57.4 cm	86.4 cm	56.9 cm	57.4 cm cm	86.3 cm cm	49.5 cm cm	36.968 kgs	0.245 m³	



Related Products & Accessories: ICB TWIN TF 1.5 Gal PE, 120/240V SST(54200.0101)









Serving & Holding Options: ICB TWIN TF 1.5 Gal PE, 120/240V SST(54200.0101)



TF SERVER, 1G DSG GEN3

Product #:42700.0200



TF SERVER, 1G DSG NOBASE GEN3

Product #:42700.0250



TF SERVER, 1.5G DSG GEN3

Product #:42750.0200



TF SERVER, 1.5G DSG NONBASE GEN3

Product #:42750.0250



TF SERVER, 1G MECH GEN3

Product #:44000.0200



TF SERVER, 1G MECH NOBASE GEN3

Product #:44000.0250



TF SERVER, 1.5G MECH GEN3

Product #:44050.0200



TF SERVER, 1.5G MECH NOBASE GEN3

Product #:44050.0250

